


SPECIFICATIONS

LOA	47' 5"
LWL	40' 6"
Beam	13' 10"
Draft	5' 6"
Height of mast above waterline	54' 5"
Displacement	38,000 lbs.
Ballast (lead)	10,500 lbs.
Sail Area Shroups	873 sq. ft.
Ketch	923 sq. ft.
Fresh Water Capacity	350 gal*
Fuel Capacity	195 gal*
Designer	R. C. Lazzara

*Usable capacities will be slightly less than measured capacity

GULFSTAR
47
SAILMASTER

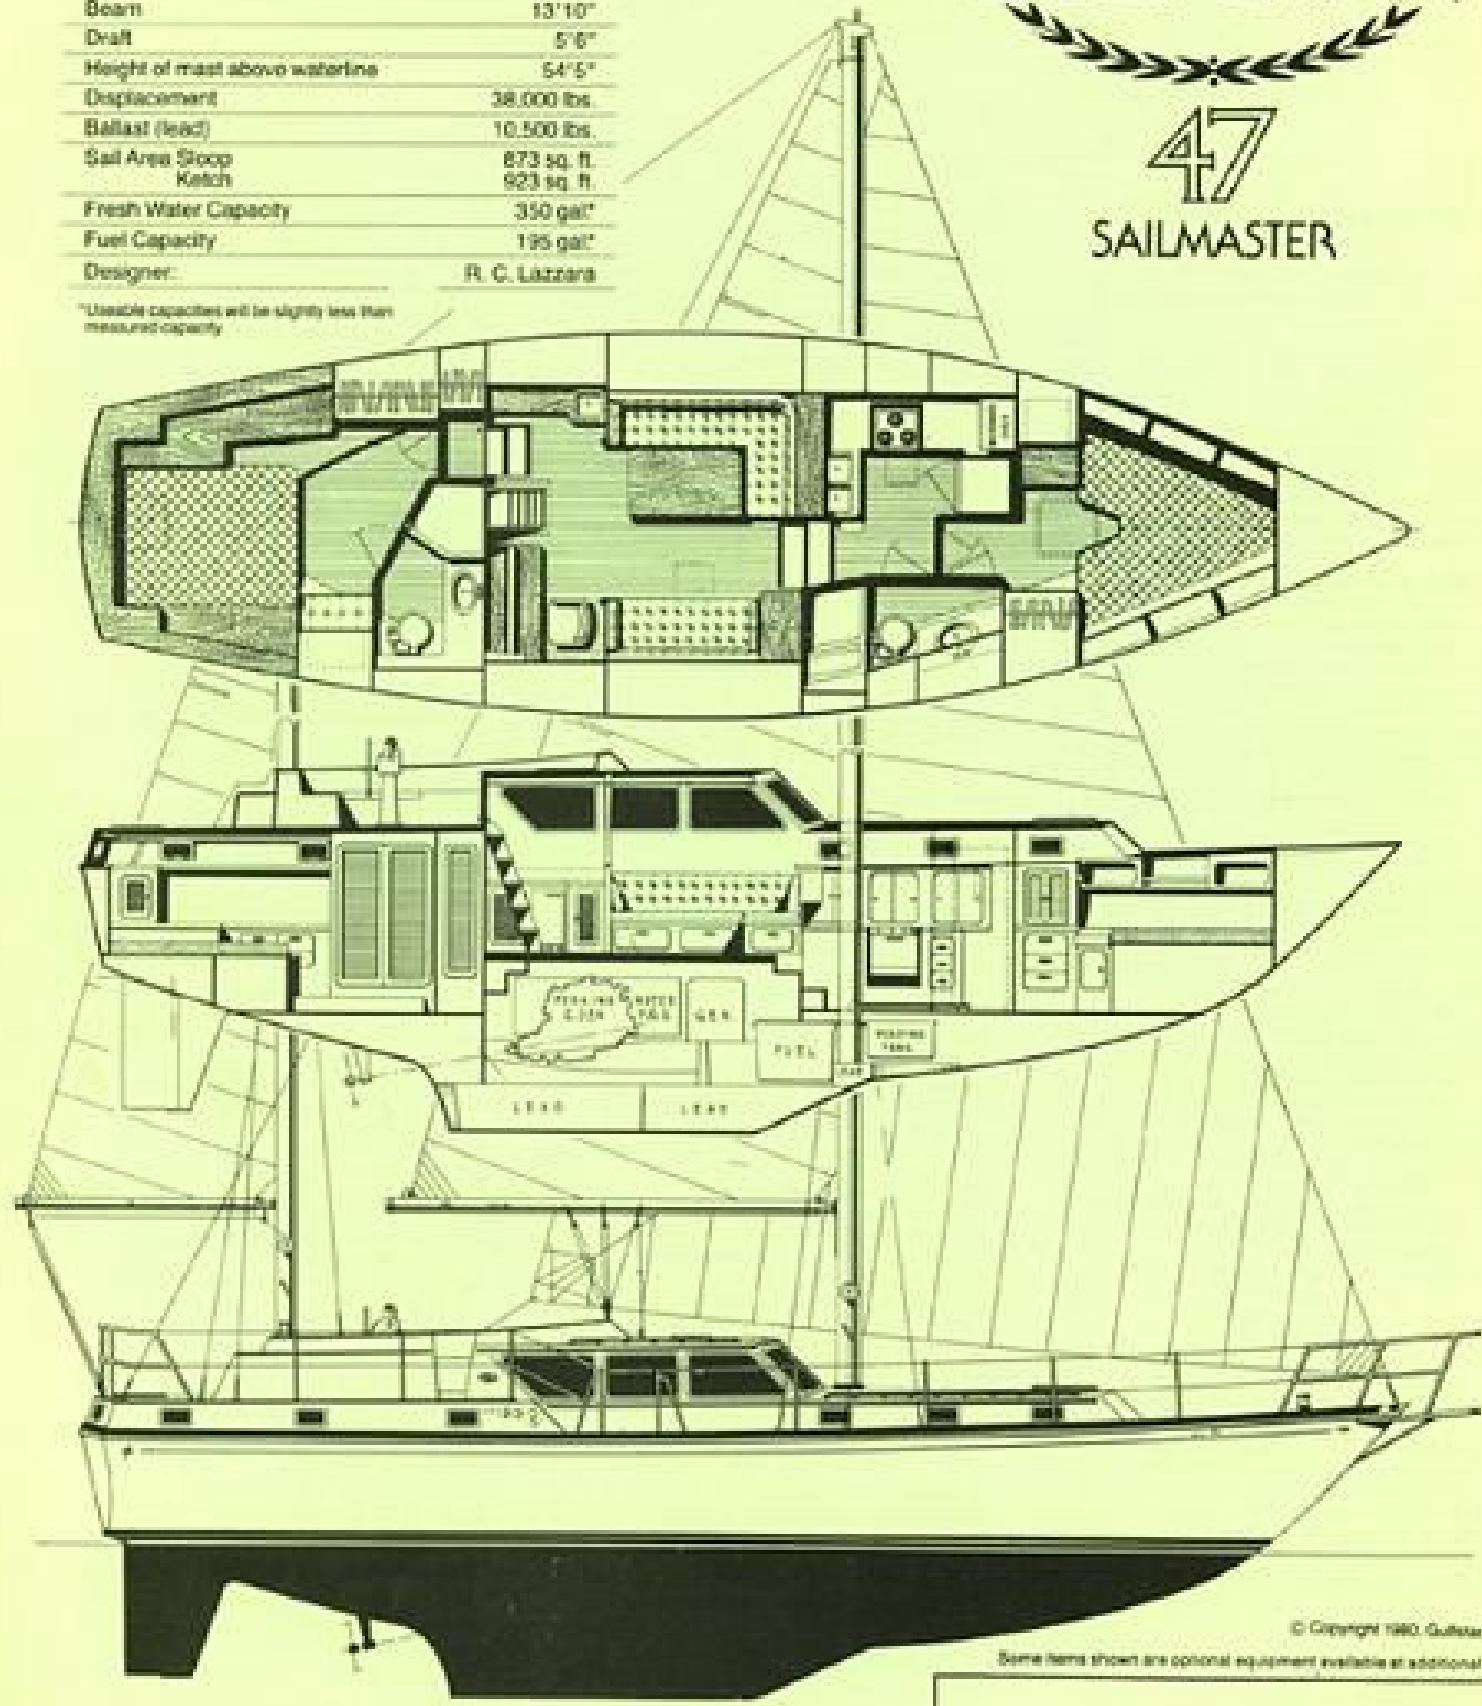

© Copyright 1980, Gulfstar Inc.

Some items shown are optional equipment available at additional cost.



47 SAILMASTER

STANDARD EQUIPMENT

HULL & DECK

Molded fiberglass hull and fiberglass balsa core reinforced deck
Cove Stripe
Molded contrasting deck nonskid (gray or beige)
Aft deck seat lockers
Propane storage compartment
Molded cockpit seat lockers
Anti-fouling bottom paint
Double stripe boot top
Aluminum rub rail with stainless steel striker over hull to deck joint

PROPELLION & STEERING

Fresh water cooled 130 bhp Perkins 6.354 diesel engine with hydraulic transmission
Insulated engine room
Three blade bronze propeller
Stainless steel propeller shaft
Bronze V-strut
Electric and manual engine stops
Alarm system for engine oil pressure and temperature
Kidde CO₂ fire extinguisher system in engine room
Pedestal steering with engine controls and engine instruments
Sheave and cable steering
5" compass with binnacle
Stainless steel destroyer type wheel
Emergency tiller

GALLEY

Norcold AC/DC refrigerator/freezer
Deluxe 3 burner stainless steel propane stove with oven, stainless steel guard rail, solenoid shutoff, and one tank
Double stainless steel galley sink
Dish lockers and utensil drawers
Dry storage bin

PLUMBING

Two private head compartments, each with marine toilet, vanity sink and teak framed mirror
Holding tank for marine waste (Type III approved system)
Walk-in shower in each head
Sump pump for each shower
Bronze seacock on all thru hulls below waterline
Bronze gate valves on all thru hulls above waterline
Pressure hot and cold water system
Complete polypropylene fresh water plumbing system
120 volt hot water system
Manual bilge pump
12 volt automatic electric bilge pump
Engine hot water heat exchange system

ELECTRICAL SYSTEM

120 volt shore power with shore cable and adapter
Deluxe aluminum electric control panel with circuit breakers for 12 volt DC and 120 volt AC systems
Heavy duty marine batteries
Vapor proof battery switches
40 amp battery charger
12 volt engine room blower
Navigation lights
Masthead light
Combination bow light and deck flood light
12 volt vapor proof engine room light with aluminum cage
120 volt duplex receptacles
12 volt light fixtures
Radio ground cable
PVC chase tube in mast for electrical harness
Battery paralleling switch for engine starting and house batteries

DECK HARDWARE

Stainless steel stemhead fitting with integral chocks
Bow and stern mooring cleats
Springline cleats and chocks
Vinyl coated stainless steel double lifelines and stainless steel stanchions
Welded stainless steel bow pulpit
Welded stainless steel stern pulpit with offset vinyl coated lifeline gate
Port and starboard lifeline gates
Genoa tracks port and starboard with two cars each side
Three-part mainsheet purchase with winch and cleat
Two genoa sheet winches and cleats
Genoa sheets and blocks
Two winch handles
Teak handrails, toe rail, drip rails and cockpit coaming cap
Atkins Hoyle aluminum opening ports with screens
Large fixed windows in salon
Removable companionway door
Atkins Hoyle aluminum hatch with tinted plexiglass on forward cabin house
Two Atkins Hoyle aluminum midship hatches with tinted plexiglass tops
One Atkins Hoyle aluminum hatch with tinted plexiglass top over galley
Low profile aluminum hatch over aft stateroom
Starboard walk-thru to cockpit
Two fixed ports in aft cabin
Two teak nameboards (blank)

SPARS & RIGGING

Sloop rig
Aluminum mast and boom (painted with Enron)
Tapered aluminum spreaders
Stainless steel standing rigging, tangs and chain plates
Main halyard winch and cleat
Jib halyard winch and cleat
Adjustable vinyl coated wire topping lift
Mainsailouthaul
Main boom sliding gooseneck assembly with slab reefing
Internal wire to rope halyards

INTERIOR

Navigator's swivel chair
Varnished interior teak, bulkheads and trim
Solid teak laminated door frames and hatch frames
Rounded bulkhead and cabinet corners
Finest quality joinery throughout
Tufted upholstery
Overhead hand rail in main salon
Drapery valance in main salon and aft cabin
White vinyl tile and mildew resistant headliner
Teak drawer pulls and faces
High pressure laminate countertops
Teak laminated sea rail on countertops
Solid teak louvered hanging locker doors
Solid teak paneled stateroom and head doors
Teak and holly sole throughout (optional)
Chrome folding step to forward berths

OPTIONAL EQUIPMENT

7.5 kw fresh water cooled Onan diesel generator with remote starter, sound shield, and Aquafilter muffler	\$7,985
Ketch rig with all standing and running rigging	6,990
Marine reverse cycle air conditioning	5,665
12 volt anchor windlass system	2,390
Clothes washer/dryer	1,975
Teak nutrail with stainless steel strikers	1,835
Hood Sea Furl roller furling genoa system	1,595
Teak anchor platform with extended bow rail	1,530
Wet bar with sink, ice maker and bottle storage in main salon	1,445
Microwave oven	990
Runtar "LECTRA/SAN" flow thru marine waste treatment system—manual flush	
Type I approved system	890
Teak parquet floor in main salon	795
Varnished teak sole	770
12 volt AM/FM stereo with 8 track and 8 speakers	650